

## LRES2002PT-POE

—PCIe x4 Dual Port 802.3at PoE+ Gigabit Vision Frame Grabber Card (Intel I350 Based)

### Overview



LRES2002PT-POE is a PCIe x4 PoE 1G dual-port copper industrial ethernet network adapter based on the Intel I350 chipset, be developed independently by Shenzhen Lianrui Electronics Co., Ltd and is compatible with x8, x16 lanes. The PoE adapter is designed mainly used on industrial field vision inspection server and equipment, vision field client, fast moving Ethernet data transmission equipment etc. It's also suitable for ordinary servers.

The Adapter controller has integrated hardware acceleration capability to perform TCP/UDP/IP checksum and load sharing and TCP segmentation task. Host processing technology can be divided into accelerators and release CPU resources to handle with other applications. The adapter is based on Intel I350 dual gigabit ethernet MAC+PHY (media access controller and physical interface transceiver) dual port controller

## Key Features

1. Single-port PoE output power consumption up to 30W.
2. Adaptive power consumption output for external devices: Class 0, Class 1, Class 2, Class 3;
3. The adapter card adopts a wider RJ45 pitch design;
4. The interface specially designed for industrial cable access, with LR-LINK customized industrial network cable, can lock the cable and network port more firmly, effectively solve the problem of unstable connection between network port and cable in industrial places. Compatible with common cable access at the same time;
5. The larger heat sink can effectively solve the heat dissipation problem of the adapter in the case of poor heat dissipation environment, and effectively ensure the stable operation of the adapter card for a long time;
6. Be carefully selected thickened gold RJ5 connector to ensure a more secure and reliable connectivity;
7. 2\*8-pin RJ45 head design can save the motherboard's valuable PCIe slot resources.

## Specifications

Controller	Intel I350
Baffle Height	Full height
Power Consumption	3.0W
PoE power/port	30W
Total output power	Power form PCIe up to 75W
	Power form 4-Pin up to 90W
System Support	Windows XP/Vista7/8/8.1/10
	Windows Server 2003 R2/2008 R2/2012 R2/2016 R2/2019 R2;
	Linux Stable Kernel version 2.6.32.x/3.x/4.x or later;
	Linux CentOS/RHEL 6.x / 7.x or later;
	Ubuntu 14.x/15.x/16.x or later;
	VMware ESX/ESXi 4.x/5.x/6.x or later
Bus Type	PCIe v2.1 x4, compatible with x8、x16
Data rate supported per port	10/100/1000MbE
Connector	2*8-Pin RJ45

## Technical Features

Protocol Support	IEEE802.3af -2003 PoE standard IEEE802.3at -2009 PoE standard IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3z IEEE 802.1Q VLANs IEEE 802.3x IEEE 1588 IEEE 802.3az - Energy Efficient Ethernet (EEE)
iSCSI	No
WoL	No
Jumbo Frames	YES
DPDK	Yes
PXE	Yes
FCoE	No

## Environment Features

Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Storage Humidity	Maximum: 90% non-condensing relative humidity at 35 °C

## Physical Features

Size(mm)	114*120*21
Weight(g)	*


## LED Indicators

LED Indicators	POE: Green
	1000Mbps:Yellow Link + Green Blink
	100Mbps: Green Blink    10Mbps, No

## Order Information


P/N	Description
LRES2002PT-POE	PCIe x4 Dual Port 802.3at PoE+ GigE Vision Frame Grabber Card (Intel I350 Based)

## Product Structure

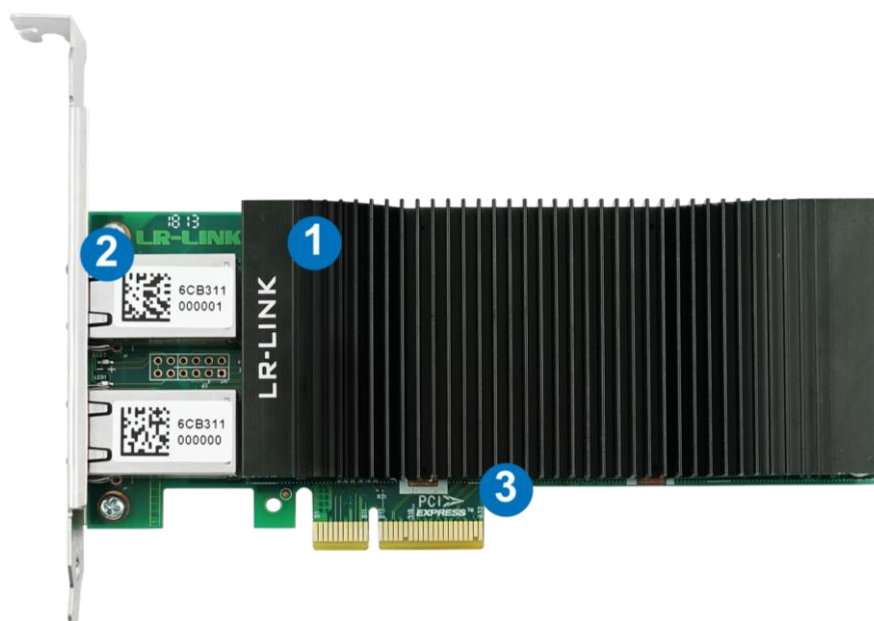

1. Heat sink
2. 2\*1G RJ45 Connector
3. PCIe x4 Bus

PS: Above details are only for reference, if there is any change, no prior notice.

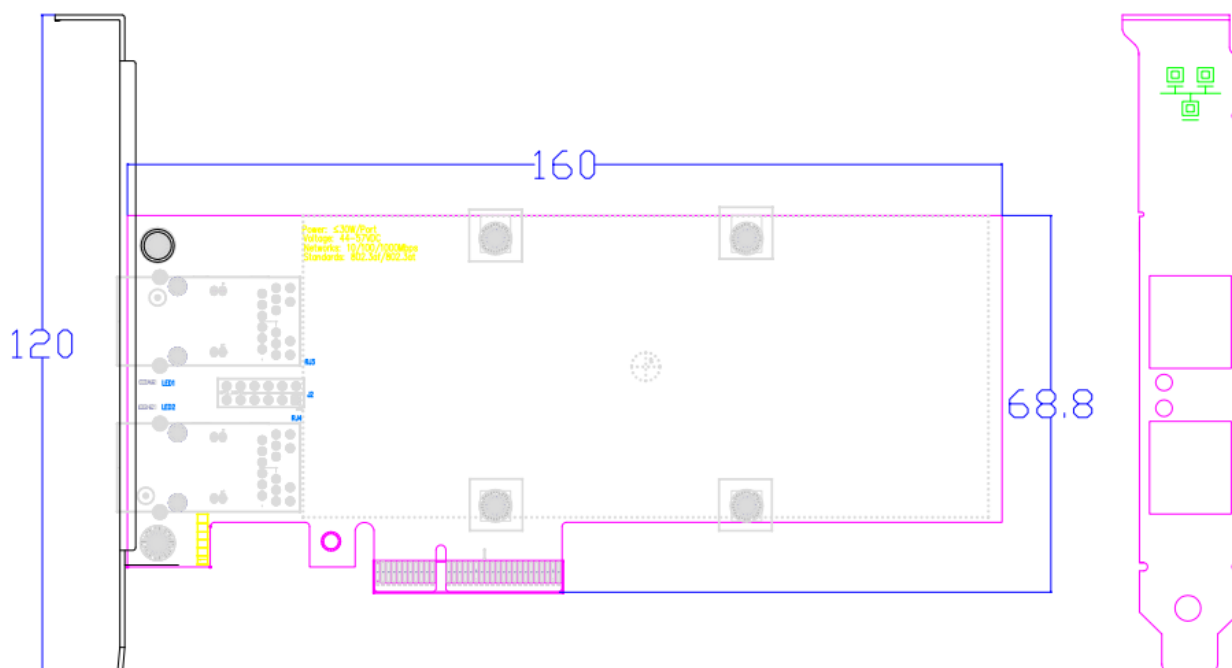

PS: Above details are only for reference. if there is any change, no prior notice.

## Companion Products

### Fiber NIC

- § LR-LINK PCI 100FX Desktop Adapter
- § LR-LINK PCIe 100FX Desktop Adapter
- § LR-LINK PCI 1000BASE-SX/LX Desktop Adapter
- § LR-LINK PCIe 1000BASE-SX/LX Desktop Adapter
- § LR-LINK PCIe 1000BASE-SX/LX Server Adapter
- § LR-LINK PCIe 10GBASE-SX/LX Server Adapter
- § LR-LINK PCIe 25GBASE-SX/LX Server Adapter
- § LR-LINK PCIe 40GBASE-SX/LX Server Adapter
- § LR-LINK PCIe 100GBASE-SX/LX Server Adapter

### Copper NIC

- § LR-LINK PCI 10/100Mbps Desktop Adapter
- § LR-LINK PCIe 10/100Mbps Desktop Adapter
- § LR-LINK PCI 10/100/1000Mbps Desktop Adapter
- § LR-LINK PCIe 10/100/1000Mbps Desktop Adapter
- § LR-LINK PCIe 10/100/1000Mbps Server Adapter
- § LR-LINK PCIe 100/1G/10Gbps Server Adapter
- § LR-LINK PCIe 1G/2.5G/5G/10Gbps Server Adapter

## Download Drivers

To get the drivers, please visit us at <http://www.lr-link.com/support/driver.html>.

## Product Quick Guide

To know the network card basic knowledge to choose the suitable NIC you need, please visit us at: <http://www.lr-link.com/productchoose.html>.

## Customer Support

LR-LINK customer Support Services offers a broad selection of programs including phone support and warranty service. For more information, contact us at Service and availability. <http://www.lr-link.com/contactus.html>

## Shenzhen Lianrui Electronics Co.,LTD.

Shenzhen Lianrui Electronics Co.,Ltd is an efficient Ethernet adapter design company with independent research and development,using Intel,Net-swift,Tehuite,Broadcom,Realtek and other manufacturers Ethernet controller, developed by our company's independent R & D design team,manufacturedby our company workshop, and then sell.

### Declaration

Our products specifications come from modifying the chip manufacturer's specifications released. Product features, technical parameters, technology right, intellectualproperty rights and brand names etc.mentioned in specifications are just referenced only.There is no infringement meaning.If there is any important andsensitive content related, please contact our Lianrui company, we'll delete them, Thank you.

한국대리점: (주)필소베네  
서울 강남구 영동대로 324, 타워크리스탈빌딩 5층 507호  
Tel: 070.4044-1118 Fax: 070-4044-1119  
sales@feelsobene.com  
www.feelsobene.com

